


CSW-120 DHW cylinder

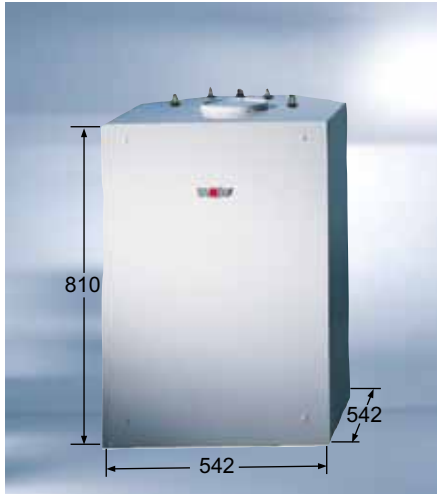

- R $\frac{3}{4}$ connections for flow, return, cold water, hot water and DHW circulation above the cylinder as well as the cleaning aperture at the top of the cylinder for easy connection and cleaning
- Powder-coated white (RAL 9016) casing
- PUR foam thermal insulation all around the cylinder, applied directly to the cylinder surface, highly effective and with low heat losses
- Corrosion protection through enamelled cylinder interior and internal indirect coil to DIN 4753, part 3 Additional corrosion protection through magnesium anode integrated into the inspection and cleaning aperture
- Internal indirect coil with large heat exchanger surface area for short heat-up times
- High constant DHW output thanks to generously sized indirect coil
- R $\frac{1}{2}$ drain outlet at the front, incl. drain valve and hose fitting
- Adjustable feet
- Five-year warranty